

MICRO fraises


Micro fraises

Mikro Fräser

Micro end mills

Micro frese

2	1	0	1	2	6	3	0	M	210.126.30	210.126.30M
MD HM/SC MG KX10	MICRO fraises MIKRO Fräser MICRO end mills MICRO frese					$\lambda 30^\circ$ $\gamma \sim 10^\circ$		PSNM		

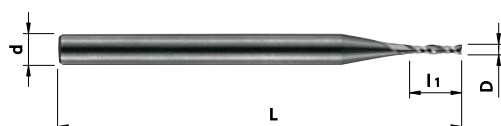

OPTI
micro



$l_1 = 5 \times D$

Type N

Norme OPTI

$D_{+/-0.01}$	d_{h5}	l_1	L	Z	Non revêtu	Revêtu PSNM
0.3	3	1.5	39	2	210.126.30-00.3	210.126.30M-00.3
0.4	3	2	39	2	210.126.30-00.4	210.126.30M-00.4
0.5	3	2.5	39	2	210.126.30-00.5	210.126.30M-00.5
0.6	3	3	39	2	210.126.30-00.6	210.126.30M-00.6
0.7	3	3.5	39	2	210.126.30-00.7	210.126.30M-00.7
0.8	3	4	39	2	210.126.30-00.8	210.126.30M-00.8
0.9	3	4.5	39	2	210.126.30-00.9	210.126.30M-00.9
1	3	5	39	2	210.126.30-01	210.126.30M-01
1.1	3	5.5	39	2	210.126.30-01.1	210.126.30M-01.1
1.2	3	6	39	2	210.126.30-01.2	210.126.30M-01.2
1.5	3	7.5	39	2	210.126.30-01.5	210.126.30M-01.5
2	3	10	39	2	210.126.30-02	210.126.30M-02

INEO
Tech
>>> p 138