





MICRO fraises

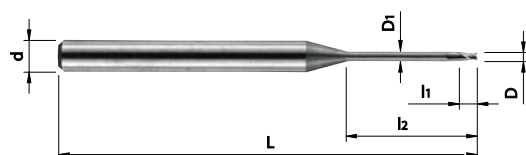
Micro fraises

Mikro Fräser

Micro end mills

Micro frese

2	1	0	1	2	8	3	0	M	210.128.30	210.128.30M
MD HM/SC MG KX10	MICRO fraises MIKRO Fräser MICRO end mills MICRO frese					$\lambda 30^\circ$ $\gamma \sim 10^\circ$		PSNM		



OPTI
micro



gamme élargie

$l_1 = 1.5 \times D$

Type N

Norme OPTI

$D_{+/-0.01}$	l_2	l_1	$D_{1-0.02/-0.05}$	d_{h5}	L	Z	Non revêtu	Revêtu PSNM
0.1	0.45	0.15	0.1	3	39	2	210.128.30-0.1	
0.15	0.5	0.2	0.15	3	39	2	210.128.30-0.15	
0.2	0.6	0.3	0.2	3	39	2	210.128.30-0.2	210.128.30M-0.2
0.25	0.75	0.35	0.25	3	39	2	210.128.30-0.25	210.128.30M-0.25
0.3	2	0.45	0.3	3	39	2	210.128.30-0.3-02	210.128.30M-0.3-02
0.4	2	0.6	0.4	3	39	2	210.128.30-0.4-02	210.128.30M-0.4-02
0.4	4	0.6	0.4	3	39	2	210.128.30-0.4-04	210.128.30M-0.4-04
0.5	4	0.75	0.5	3	39	2	210.128.30-0.5-04	210.128.30M-0.5-04
0.5	6	0.75	0.5	3	39	2	210.128.30-0.5-06	210.128.30M-0.5-06
0.6	4	0.9	0.6	3	39	2	210.128.30-0.6-04	210.128.30M-0.6-04
0.6	6	0.9	0.6	3	39	2	210.128.30-0.6-06	210.128.30M-0.6-06
0.7	4	1.05	0.7	3	39	2	210.128.30-0.7-04	210.128.30M-0.7-04
0.7	6	1.05	0.7	3	39	2	210.128.30-0.7-06	210.128.30M-0.7-06
0.8	4	1.2	0.8	3	39	2	210.128.30-0.8-04	210.128.30M-0.8-04
0.8	6	1.2	0.8	3	39	2	210.128.30-0.8-06	210.128.30M-0.8-06
0.8	9	1.2	0.8	3	39	2	210.128.30-0.8-09	210.128.30M-0.8-09
0.9	6	1.35	0.9	3	39	2	210.128.30-0.9-06	210.128.30M-0.9-06
0.9	9	1.35	0.9	3	39	2	210.128.30-0.9-09	210.128.30M-0.9-09
1	6	1.5	1	3	39	2	210.128.30-1-06	210.128.30M-1-06
1	9	1.5	1	3	39	2	210.128.30-1-09	210.128.30M-1-09
1	12	1.5	1	3	39	2	210.128.30-1-12	210.128.30M-1-12
1.2	6	1.8	1.2	3	39	2	210.128.30-1.2-06	210.128.30M-1.2-06
1.2	9	1.8	1.2	3	39	2	210.128.30-1.2-09	210.128.30M-1.2-09
1.2	12	1.8	1.2	3	39	2	210.128.30-1.2-12	210.128.30M-1.2-12
1.4	6	2.1	1.4	3	39	2	210.128.30-1.4-06	210.128.30M-1.4-06
1.4	9	2.1	1.4	3	39	2	210.128.30-1.4-09	210.128.30M-1.4-09
1.5	6	2.25	1.5	3	39	2	210.128.30-1.5-06	210.128.30M-1.5-06
1.5	9	2.25	1.5	3	39	2	210.128.30-1.5-09	210.128.30M-1.5-09
1.5	12	2.25	1.5	3	39	2	210.128.30-1.5-12	210.128.30M-1.5-12
1.8	9	2.7	1.8	3	39	2	210.128.30-1.8-09	210.128.30M-1.8-09
1.8	12	2.7	1.8	3	39	2	210.128.30-1.8-12	210.128.30M-1.8-12
2	9	3	2	3	39	2	210.128.30-2-09	210.128.30M-2-09
2	12	3	2	3	39	2	210.128.30-2-12	210.128.30M-2-12

INEO
Tech

>>> p 138